

Proudfoot Company, Inc

588 Pepper Street

Monroe, CT, 06468, US

Phone: 203.459.0031


Fax: 203-459-0033

Toll-free: 800.445.0034

Email: Info@TheProudfootCompany.com

Website: <http://www.tbeproudfootcompany.com>

Item # WP-HA, High Abuse Wall Panel

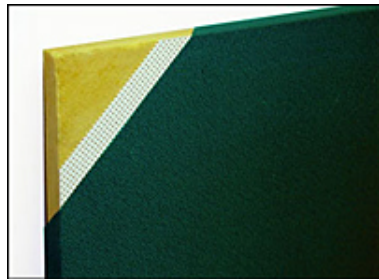

High Abuse Wall Panel

Acoustical Wall Panels by Noisemaster® are the solution for areas that require noise reduction and are available in a variety of models for various applications.

The WP-HA Wall Panel is manufactured specifically as a high abuse absorber panel that offers both excellent absorption and high durability. Application for the WP-HA panels includes gymnasiums, schools, universities, prisons, recreation centers and any area where excess reverberation and abuse resistance is required.

WP-HA High-Abuse Wall Panels are constructed using a high impact 1/16" thick perforated co-polymer underlayment laminated over a 1" or 2" thick 6-7 PCF fiberglass absorber core. The panels are fully wrapped in standard, custom or C.O.M. fabric. Panels are available in 1 1/16" and 2 1/16" thickness with sizes up to a maximum of 4' x 10'.

WP-HA panels are easily installed using mechanical clips or adhesive and impaling clips. Consult with factory on the best-suited mounting for your specific application.

SPECIFICATIONS

Thickness	1 1/16 in 2 1/16 in
Max. Size	4 x 10 ft
Color Options	60+
Fire Safety	ASTM E-84
Finishes	<ul style="list-style-type: none"> • Guilford of Maine FR701 Style 2100 is standard • Custom or Designer fabric also available
Mounting Options	<ul style="list-style-type: none"> • 2 part Mechanical Clip • Clip & Velcro
Edge Detail	<ul style="list-style-type: none"> • Square, Mitre, or Bevel
Acoustical	<p>NRC Rating</p> <ul style="list-style-type: none"> • 1 1/16" = 0.80 - 0.90 • 2 1/16" = 1.05 - 1.15
Fire Rating	<ul style="list-style-type: none"> • All components shall have a Class A fire rating per ASTM E-84