

**Proudfoot Company, Inc**

588 Pepper Street

Monroe, CT, 06468, US

Phone: 203.459.0031

Fax: 203-459-0033

Toll-free: 800.445.0034


Email: [Info@TheProudfootCompany.com](mailto:Info@TheProudfootCompany.com)

Website: <http://www.tbeproudfootcompany.com>

---

## Item # WP-SB, Sound Barrier Wall Panel

---

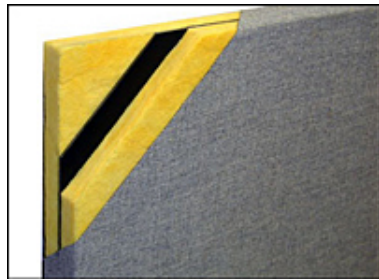

### Sound Barrier Wall Panel

Acoustical Wall Panels by Noisemaster® are the solution for areas that require noise reduction and are available in a variety of models for various applications.

The WP-SB Wall Panel is manufactured specifically as a composite barrier/absorber panel that offers both superior absorption and noise blocking performance. Application for the WP-SB panels includes corporate offices, conference rooms, doctor's offices, waiting rooms, classrooms and any area where speech privacy is a concern.

The WP-SB Noise Barrier Wall Panels are the solution to speech privacy problems, providing clients the confidence that confidential conversations will not be overheard.

WP-SB Panels are constructed using 2 layers of a 6-7# PCF rigid fiberglass core around 1lb per square foot non-reinforced loaded vinyl noise barrier. Panels are available in 1 1/8", 1 5/8", and 2 1/8" thickness, with a maximum size up to 4' x 10' and may be finished in custom, designer or C.O.M fabric.

WP-SB Panels can be installed with impaling clips, top hook and construction adhesive. Due to panel weight up to 2.5 lbs per square foot, panels must be installed from floor to ceiling. Floor molding can be re-installed after installation of WP-SB panels.

---

## SPECIFICATIONS

---

Thickness	1 1/8 in 1 5/8 in 2 1/8 in
Max. Size	4 x 10 ft
Weight	2.5 lbs/ft <sup>2</sup>
Color Options	60+
Fire Safety	ASTM E-84
Finishes	<ul style="list-style-type: none"> <li>• Guilford of Maine FR701 Style 2100</li> <li>• Custom or designer fabric also available</li> </ul>
Mounting Options	<ul style="list-style-type: none"> <li>• Impaling Clip and Top Tooth</li> </ul>
Edge Detail	<ul style="list-style-type: none"> <li>• Square, Bevel, or Radius</li> </ul>

Acoustical	<p>NRC Rating</p> <ul style="list-style-type: none"><li>• 1 1/8" = 0.80 - 0.90</li><li>• 2 1/8" = 0.90 - 1.00</li></ul> <p>STC Rating</p> <ul style="list-style-type: none"><li>• 1 1/8" = 0.29</li><li>• 2 1/8" = 0.30</li></ul>
Fire Rating	<ul style="list-style-type: none"><li>• All components shall have a Class A fire rating per ASTM E-84</li></ul>