

**Proudfoot Company, Inc**

588 Pepper Street

Monroe, CT, 06468, US

Phone: 203.459.0031


Fax: 203-459-0033

Toll-free: 800.445.0034

Email: [Info@TheProudfootCompany.com](mailto:Info@TheProudfootCompany.com)

Website: <http://www.tbeproudfootcompany.com>

## Item # WP-T, Tackable Wall Panel

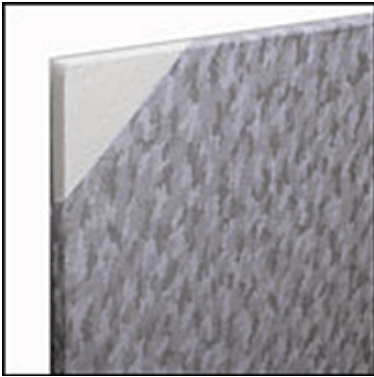

### Tackable Wall Panel

Acoustical Wall Panels by Noisemaster® are the solution for areas that require noise reduction and are available in a variety of models for various applications.

The WP-T Wall Panel is manufactured specifically as a tack panel and offers minimal sound absorption. Application for the WP-T panels includes conference rooms, classrooms, offices and any area where low absorption and high tackability is required.

The WP-T Panel is constructed with a 24# PCF mineral fiber core. Edges are fully wrapped in standard, custom or C.O.M. fabric with the option of square or bevel edge detail. Panels are available in 1/2" or 3/4" thick with standard or custom sizes up to a maximum of 4' x 8'.

WP-T panels are easily installed with nails and construction adhesive, mechanical clips or hoop and loop.

## SPECIFICATIONS

Thickness	1/2 in 3/4 in
Max. Size	4 x 8 ft
Color Options	60+
Fire Safety	ASTM E-84
Finishes	<ul style="list-style-type: none"> <li>• Guilford of Maine FR701 Style 2100 is standard</li> <li>• Custom or Designer fabric also available</li> </ul>
Mounting Options	<ul style="list-style-type: none"> <li>• Adhesive</li> </ul>
Edge Detail	<ul style="list-style-type: none"> <li>• Square or Bevel</li> </ul>
Acoustical	NRC Rating <ul style="list-style-type: none"> <li>• 1/2" = 0.20</li> <li>• 3/4" = 0.60</li> </ul>
Fire Rating	<ul style="list-style-type: none"> <li>• All components shall have a Class A fire rating per ASTM E-84</li> </ul>