


Item # NM LAG-1, Pipe & Duct Lagging

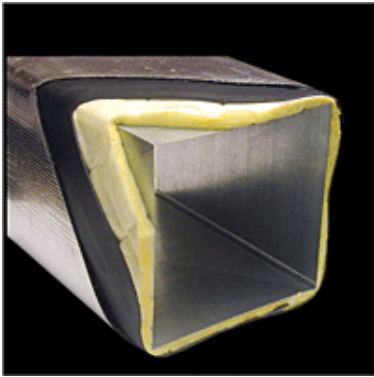

Pipe & Duct Lagging

A composite material featuring a flexible one-pound per square foot reinforced-foil faced loaded vinyl noise barrier bonded to a 1" thick quilted fiberglass sound absorber. Used to wrap noisy pipes, ducts, valves and fan housings.

- Easy to cut, wrap and install with matching lag tape
- Class A (or 1) flammability rating per ASTM E-84
- Standard roll is 54" wide x 30' long

1 lb. psf reinforced-foil faced loaded vinyl barrier bonded to a 1" thick scrim faced quilted fiberglass absorber.

SPECIFICATIONS

Nominal Thickness	1.0 in
Standard Width	54 in
Roll Length	30 ft
R Factor	4.0
Temperature Range	-20 to 220 °F
Weight	1.2 lbs/ft ²
Fire Rating	ASTM E-84
Flammability	Class A (or 1) Per ASTM E-84 Smoke Density index 19.5 Flame spread index 12.5
Applications	Typically used to wrap noisy pipes and ducts to block the noise that transmits through the walls of the pipe or duct as air or other contents move through it. The quilted fiberglass decoupler improves the performance of the noise barrier and provides sound