

Proudfoot Company, Inc

588 Pepper Street

Monroe, CT, 06468, US

Phone: 203.459.0031


Fax: 203-459-0033

Toll-free: 800.445.0034

Email: Info@TheProudfootCompany.com

Website: <http://www.tbeproudfootcompany.com>

Item # NM LAG-2, Pipe & Duct Lagging

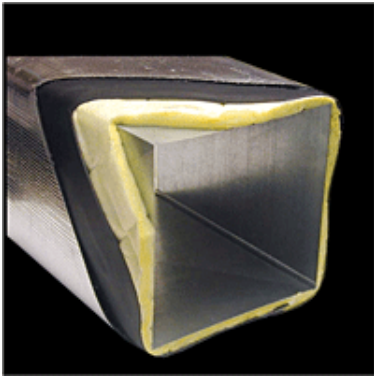

Pipe & Duct Lagging

Nosiemaster's NM LAG-2 is a composite material featuring a flexible one-pound per square foot reinforced-foil faced loaded vinyl noise barrier bonded to a 2" thick scrim faced quilted sound absorber / decoupler. Used to wrap noisy pipes, ducts, valves and fan housings.

- Standard roll is 54" wide x 30' long
 - Accepts matching Wrap Tape for easy Installation
 - Class A (or 1) flammability rating per ASTM E-84
- 1 Lb-psf foil-faced loaded vinyl barrier bonded to a 2" thick scrim faced quilted fiberglass absorber

SPECIFICATIONS

Nominal Thickness	2.0 in
Standard Width	54 in
Roll Length	30 ft
R Factor	9.0
Temperature Range	-20 to 220 °F
Weight	1.3 lbs/ft ²
Fire Rating	ASTM E-84
Flammability	Smoke Density index 19.5 Flame spread index 12.5
Applications	Typically used to wrap noisy pipes and ducts to block the noise that transmits through the walls of the pipe or duct as air or other contents move through it. The 2" thick quilted fiberglass absorber/decoupler improves low frequency acoustical performance