

Proudfoot Company, Inc

588 Pepper Street

Monroe, CT, 06468, US

Phone: 203.459.0031


Fax: 203-459-0033

Toll-free: 800.445.0034

Email: Info@TheProudfootCompany.com

Website: <http://www.tbeproudfootcompany.com>

Item # BA-1, BA-1 Noise Barrier/Sound Absorber Composite

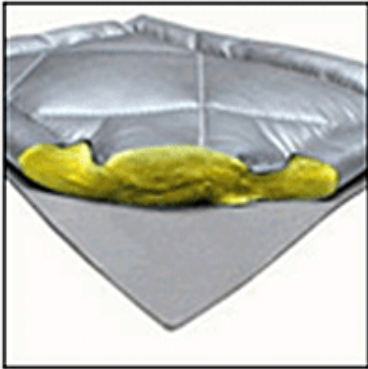

BA-1 Noise Barrier/Sound Absorber Composite

Noise Master's BA-1 offers the benefits of a noise barrier and a sound absorber. The BA-1 consists of a vinyl-coated-fiberglass-cloth facing on 1" quilted fiberglass that is bonded to a reinforced 1-lb psf loaded vinyl barrier. Curtain panels are constructed with grommets across the top and Velcro along the vertical edges. Rolls are available 54" wide x 25' long and can be supplied with edges bound or unbound (note: barrier is 54" wide, quilt is held 3" in from each vertical edge, and measures 48")

- Class A (or 1) flammability rated per ASTM E84
- Available facing colors: gray, white, black, or tan
- Available barrier colors: gray, tan, or blue

Vinyl coated fiberglass cloth facing on 1" quilted fiberglass/ 1lb-psf reinforced loaded vinyl barrier

SPECIFICATIONS

Nominal Thickness	1.0 in
Temperature Range	-20 to 180 °F
Standard Width	54 in
Roll Length	25 ft
Flammability	Flame Spread: 23.0 Smoke Density: 30.0
Available Facing Color	Black Gray Tan White
Available Barrier Color	Blue Gray Tan
Weight	1.3 lbs/ft ²
Applications	Typically used as curtain panels in acoustical curtain enclosures where abuse resistance or excellent durability is required. Frequently used as sliding doors on acoustical curtain enclosures. Also, preferred for use in temporary outdoor applications such