

**Proudfoot Company, Inc**

588 Pepper Street

Monroe, CT, 06468, US

Phone: 203.459.0031


Fax: 203-459-0033

Toll-free: 800.445.0034

Email: [Info@TheProudfootCompany.com](mailto:Info@TheProudfootCompany.com)

Website: <http://www.tbeproudfootcompany.com>

## Item # BA-2, BA-2 Noise Barrier/Sound Absorber Composite

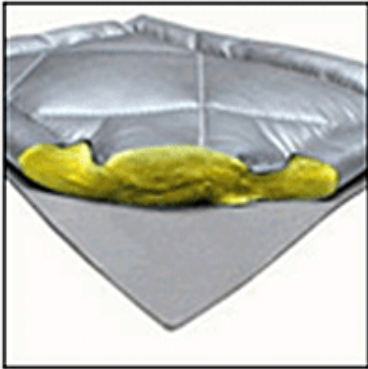

### BA-2 Noise Barrier/Sound Absorber Composite

BA-2 offers the benefits of both a noise barrier and a sound absorber composite. The BA-2 consists of a two-inch thick vinyl-coated-fiberglass-cloth faced quilted fiberglass that is bonded to a one-pound per sq. ft. reinforced loaded vinyl barrier. Curtain panels are constructed with grommets across the top and Velcro seals along the vertical edges. Rolls are available 54" wide x 25' long and can be supplied with edges bound or unbound. (Note: barrier is 54" wide, quilt is 48" wide and is held 3" in from each vertical edge.)

- Class A (or 1) flammability rated per ASTM E- 84
- Available facing colors on quilt: gray, white, black, or tan
- Available barrier colors: gray, tan, or blue

Vinyl coated fiberglass cloth facing on 2" quilted fiberglass/ 1 lb-psf reinforced loaded vinyl barrier

## SPECIFICATIONS

Nominal Thickness	2.0 in
Temperature Range	-20 to 180 °F
Standard Width	54 in
Roll Length	25 ft
Flammability	Flame Spread: 23.0 Smoke Density: 30.0
Available Facing Color	Black Gray Tan White
Available Barrier Color	Blue Gray Tan
Weight	1.5 lbs/ft <sup>2</sup>
Applications	Typically used as modular curtain panels in acoustical curtain enclosures where abuse resistance or excellent durability as well as maximum noise reduction is required. Also used as sliding acoustical doors, durable acoustical jacket on fans, or as a temp