

**Proudfoot Company, Inc**

588 Pepper Street

Monroe, CT, 06468, US

Phone: 203.459.0031

Fax: 203-459-0033

Toll-free: 800.445.0034

Email: Info@TheProudfootCompany.com



Website: http://www.tbeproudfootcompany.com

## Type RSC

Non-reinforceable Soundblox acoustical masonry unit. Incorporates a metal septum and filler for superior sound absorption.

### Left-Hand and Right-Hand Units

For situations requiring a full core for vertical reinforcement, SOUNDBLOX units with open cavities on either the left- or right-hand side are available (for 8" and 12" type RSC units). When used in conjunction with standard SOUNDBLOX units, reinforcing bars and grout can be incorporated easily and efficiently. SOUNDBLOX left-hand and right-hand units have been approved for use in reinforced masonry construction and are allowed 90% of the shear value of ordinary hollow concrete block.

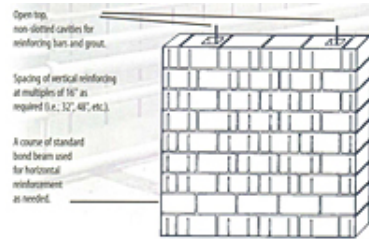

Results 1 - 5 of 5

Item #	Size	Type	Exposed Slots	Cavities	Solid Content	Equivalent Thickness
4-RSC	16" x 8" x 4"	RSC	2	3	73.0 %	2.646
6-RSC	16" x 8" x 6"	RSC	2	3	65.5 %	3.684
8-RSC	16" x 8" x 8"	RSC	2	4	65.0 %	4.956
6" RSC/DBL	6" X 8" X 16"	6" RSC/DBL	4	4	n/a	n/a
12-RSC	12" x 8" x 16"	RSC	2	4	62.2 %	7.231

Results 1 - 5 of 5